

# 120V BRIO BRD LED Disc Light

PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_

LOCATION: \_\_\_\_\_ CAT: \_\_\_\_\_



### Description

Low-profile LED downlight with remote driver and junction box in round or square trim options with white finish

### Features

- Each fixture includes a remote driver housed in an attached junction box with two knockouts
- No recessed housing/can required! Fixture utilizes spring-loaded mounting clips for ease of installation
- Rough-in plates available for new construction
- Low-profile (1/2" height) for flexible installs
- Type IC and Wet Location rated
- Low-VOC powder coated, die-cast aluminum housing with polycarbonate lens

### Mounting

Direct install with spring-loaded mounting clips, no can needed; Rough-in plates available for new construction (sold separately)

### Applications

General Lighting LED Remodel

### Warranty


5 years

## Technical Information




Voltage	120V AC			
Driver Current	280mA			
Size	4"	6"	4"	6"
Trim Style	Round			
CCT	3000K		3000K-4000K-5000K	
Wattage	9W	12W	9W	12W
Lumens (up to)	600Lm	850Lm	675Lm	975Lm
CRI	92+			
Finish	White			
Beam Angle	110°	109°	110°	109°
Dimming	10-100% with most standard CFL/LED or Incandescent dimmers			
Power Factor	>0.9			
Operating Temp	-13°F (-25°C) to +113°F (+45°C)			
Rating	ENERGY STAR; cETLus Listed; Type IC; Airtight; Wet location			
Rated Life	35,000 Hours			

### Dimensions

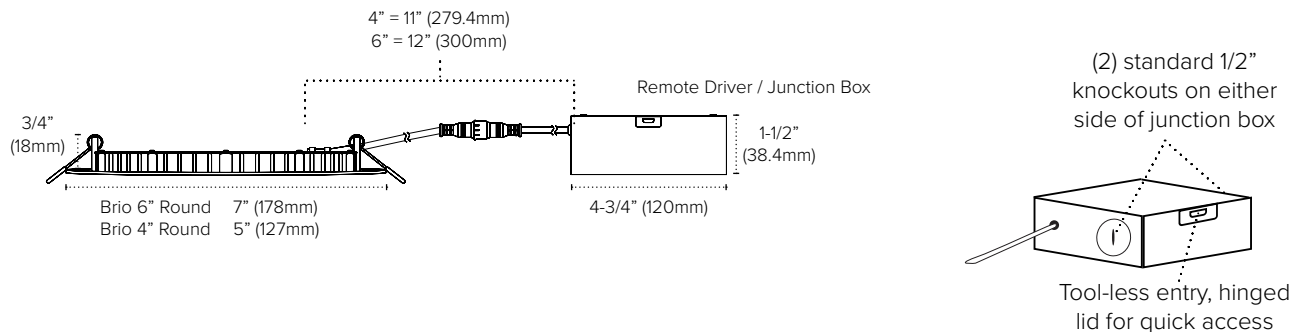

## Ordering Information

### 120V AC, 60Hz Brio Downlight

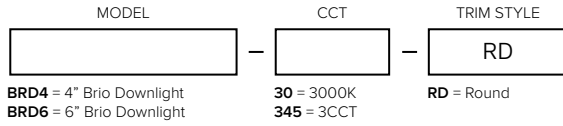




### Brio Downlights Include:

- (1) Brio downlight with butterfly clips
- (1) Remote driver housed in attached junction box

Example Part # **BRD4-30-RD**



## Accessories

Image	Part Number	Description
	BRD-EXT8	8ft Driver Extension Cable for BRD4-30 and BRD6-30 static white only; White Finish; Inter-connectable
	BR4-MP-RD	Steel rough-in plate for 4" Round Brio downlight, new construction
	BR6-MP-RD	Steel rough-in plate for 6" Round Brio downlight, new construction


## Compatible Dimmers

Brand	Model #	Type	Dimming Range	Notes
Lutron® Diva	DVCL-153P	Universal (CFL/LED/Incandescent)	10-100%	
Lutron® Toggler	TGCL-153H	Universal (CFL/LED/Incandescent)	20-100%	
Lutron® Skylark	SELV-300P	Electronic Low-Voltage (ELC)	10-100%	
Lutron® Diva	DV-600P	Incandescent	20-100%	
Leviton® Sureslide	6674	Universal (CFL/LED/Incandescent)	10-100%	


Minimum loads may apply. Dimmer performance may vary in field application due to unknown external factors. Dimmers not included on the chart above are not necessarily incompatible; they have yet to be fully evaluated. Please reference dimmer manufacturer's instructions for more detailed information regarding performance and compatibility.

## Photometrics

BRD4

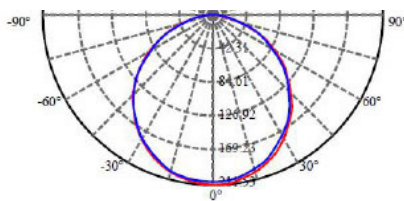


BRD6

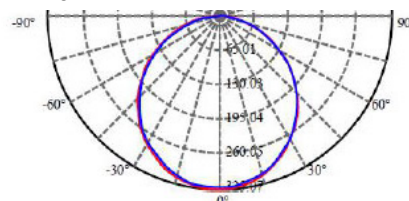

Model #	Amperage	Wattage
BRD4-30-RD	0.075	9W
BRD6-30-RD	0.1	12W

Additional Information

HOLE CUT SIZES	4" BRIO	6" BRIO
Round	4-17/32" (115mm) Diameter - Round	65/16" (160mm) Diameter - Round

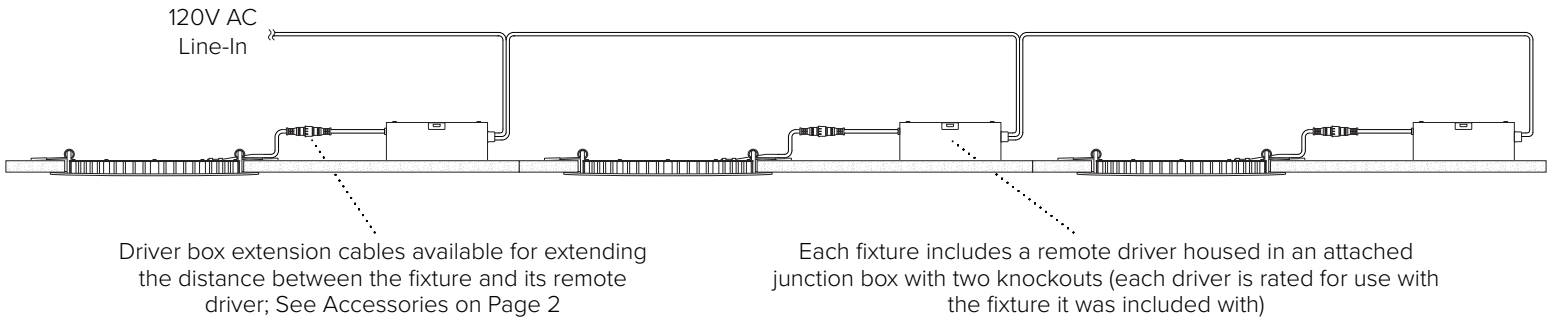

NOTES

---



---



---



---



---